# Data sheet

valid from: 4/5/26

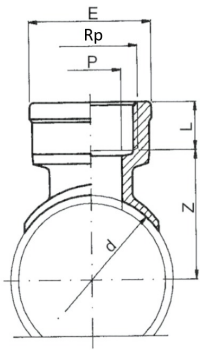


## TP Saddle with female thread Rp PVC-U

| d (mm) | Rp (inch) | PN (bar) | Code | SP | GP | Weight (kg) | P (mm) | E (mm) | L (mm) | Z (mm) |
|---|---|---|---|---|---|---|---|---|---|---|
| 32 | ¼ | 10 | **DV0DEF32Z** | 15 | | 0.010 | 11 | 24.2 | 12.9 | 28.9 |
| 40 | ⅜ | 10 | **DV0DEF40A** | 15 | | 0.009 | 11 | 24.2 | 14.0 | 32.0 |
| 50 | ¼ | 10 | **DV0DEF50Z** | 15 | | 0.011 | 11 | 24.2 | 12.9 | 37.9 |
| 50 | ⅜ | 10 | **DV0DEF50A** | 15 | | 0.010 | 11 | 24.2 | 14.0 | 37.0 |
| 50 | ½ | 10 | **DV0DEF50B** | 15 | | 0.015 | 14 | 30.0 | 15.0 | 42.0 |
| 50 | ¾ | 10 | **DV0DEF50C** | 10 | | 0.023 | 19 | 36.0 | 16.3 | 43.0 |
| 63 | ⅜ | 10 | **DV0DEF63A** | 15 | | 0.009 | 11 | 24.2 | 14.0 | 43.5 |
| 63 | ½ | 10 | **DV0DEF63B** | 10 | | 0.015 | 14 | 30.0 | 15.0 | 48.0 |
| 63 | ¾ | 10 | **DV0DEF63C** | 10 | | 0.020 | 19 | 36.0 | 16.3 | 49.0 |
| 75 | ⅜ | 10 | **DV0DEF75A** | 15 | | 0.016 | 11 | 24.2 | 14.0 | 49.5 |
| 75 | ¾ | 10 | **DV0DEF75C** | 150 | | 0.022 | 19 | 36.0 | 16.3 | 55.0 |
| 75 | 1 | 10 | **DV0DEF75D** | 50 | | 0.039 | 24 | 45.0 | 19.1 | 56.0 |
| 90 | ½ | 10 | **DV0DEF90B** | 15 | | 0.015 | 14 | 30.0 | 15.0 | 62.0 |
| 90 | 1 | 10 | **DV0DEF90D** | 10 | | 0.036 | 24 | 45.0 | 19.1 | 64.0 |
| 90 | 1 ½ | 10 | **DV0DEF90F** | 24 | | 0.095 | 38 | 64.0 | 21.4 | 66.0 |
| 110 | ½ | 10 | **DV0DEF91B** | 15 | | 0.015 | 14 | 30.0 | 15.0 | 72.0 |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com